

Drying of fruits

Dr. Sturm, Barbara, von Gersdorff, Gardis

Affiliation: University of Kassel, Department of Agricultural and
Biosystems Engineering

Witzenhausen (Germany)

barbara.sturm@uni-kassel.de

- General aims and challenges of dehydration
- Scientific approaches
- Orchard related fruit drying
- Quality parameters for dried fruits
- Aims in fruit drying
- Influencing factors on fruit quality
- Improvements in fruit drying
- Powder production

This module should give the user a deeper understanding of the **drying process of fruits** and highlights the **influencing factors** on **high product quality** and **efficient processing**

- **Reduction** of moisture content
 - **Reduction** of chemical and biological activity
 - **Shelf life** extension
 - **Prevention** of dry matter losses
 - **Easy and cheap** handling of products
 - **Maintain** nutritional, biological and technical properties of the product
- ⇒ Dehydration of food is responsible for **15-25 %** of the industrial energy consumption at **low energy efficiencies** (35-45%) and often unsatisfactory product quality

Excursion: Moisture content

Wet basis moisture content (MC_{wb} , also known as W) is most common for farmers and producers and is defined as:

$$MC_{wb} = \frac{\text{weight of water}}{\text{weight of dry matter} + \text{weight of water}} \cdot 100$$

Fruits are stable at **10 %** MC_{wb}

Excursion: Moisture content

Dry basis moisture content (MC_{db} , also known as X) is most common for scientists and is defined as

$$MC_{db} = \frac{\text{weight of water}}{\text{weight of dry matter}} \cdot 100$$

It is converted as follows:

$$MC_{wb} = \frac{MC_{db}}{100 + MC_{db}} \cdot 100 \quad \text{or} \quad MC_{db} = \frac{MC_{wb}}{100 - MC_{wb}} \cdot 100$$

Challenges during the drying process

- Vitamin degradation
 - Most of the vitamins are not heat stable or are reduced by enzymatic oxidation

- Changes in structure, texture, colour, flavour, taste
 - Protein denaturation
 - Protein/Lipid oxidation
 - Non-enzymatic reactions (e.g. browning)

- Often not fully reconstitutionable
 - Complete rehumidification is not possible; less water than being lost during drying can be absorbed

Initial Situation (Mujumdar, 2007)

- ⇒ Out of date technical devices
- ⇒ Unnecessarily long drying times
- ⇒ Increased energy demand
- ⇒ Dependency on oil and gas prices
- ⇒ Need of customisation
- ⇒ Product temperature usually is unknown

Goals

- ⇒ Targeted control of process
- ⇒ Technically easily implementable solutions (upgrade of devices)
- ⇒ Increased capacity or smaller devices
- ⇒ Flexibility in production
- ⇒ Reduction of energy costs and demands

Process Analysis and Optimisation

- ⇒ Thermodynamics
- ⇒ Product quality
- ⇒ Unit operation or part of whole process

Process Control (air temperature, velocity and rel. humidity)

- ⇒ Single stage
 - ⇒ Multi stage, time controlled (Chua et al., 2000)
 - ⇒ Multi stage, based on optical analysis (Martyntenko, 2008)
- Measured values have to be used to feedback to the system, e.g. adaption of process parameters
 - ⇒ At every point of the drying process, the relation between **air temperature, velocity** and **relative** humidity should be balanced

⇒ **Orchards are extensively used with a high environmental significance**

- Conservation of cultural landscape
- Species conservation
- Cultivation of regional fruits

Negative effect: Smaller yields compared to intensive fruit cultivation

Value adding for products is needed to increase the economical value of orchards

Efficient processing is needed!

Quality parameters for dried fruits

⇒ What does quality mean?

- **It defines the degree of convergence between expectation to/ requirement of a product and its actual characteristics**
 - Product quality
 - Process quality
 - Consumers (retailers) oriented quality

Quality parameters for dried fruits

- Colour (appearance)
- Amount of essential oils/aroma (smell, taste, nutritional value)
- Nutritional value (vitamins etc.)
- Secondary plant components (nutritional value)
- Structure (appearance)

It is not avoidable to influence the parameters negatively during the dehydration process due to oxidation and evaporation, but changes can be reduced to a minimum

⇒ drying **cannot** improve the quality of the raw material!

- Microbial infestation (mould, yeasts, bacterial pathogens)
⇒ **cannot** be decreased by drying, but growing can be inhibited

Phases of fruits drying

⇒ Phase I (only when surface moisture exists, shortest phase)

- Evaporation on the surface
- Constant drying rate

⇒ Phase II

- Evaporation from interior of products and diffusion through already dried layers
- Increasing temperature inside the product
- Declining drying rate

⇒ Phase III

- Further evaporation of physicochemical water until moisture equilibrium is reached

- ⇒ The dehydration process for fruits should be as short as possible
- **Long drying times decrease product quality** due to chemical and physical changes
 - Achievable through **product oriented drying processes** and **control** of drying parameters
 - **Avoidance of over drying**
 - and therefore loss of valuable compounds, colour etc.
 - Drying process should be stopped when the final moisture content is reached, **not** after a certain time!
 - **High energy saving potential->reduction of processing costs**

Aims in fruit drying

The drying process aims to dry the product as quick as possible

to avoid:

- **microbial growth** (which needs moist and temperature +/- 37°C)
- **Degradation processes** of color and valuable components due to oxidation

The air velocity needs to be sufficient (at least 0.12 m/s) to achieve a sufficient relative air mass flow

- **Too high** -> unsaturated air, inefficient
- **Too low** -> saturated air, moisture remains on the product surface, inefficient, longer drying times
- **Risk of moisture accumulation** due to unequal drying

Especially in low temperature drying the air velocity is the most important drying parameter!

- Targeted short drying times risk the application of too high drying temperatures
 - Porous surfaces and cell damages of the final product
 - Degradation of valuable compounds

- Too low temperatures risk unnecessary long drying times
 - quality losses caused by long reaction times for degradation processes
 - High energy consumptions

⇒ **The “Golden medium” needs to be required to achieve minimum quality losses and appropriate energy consumptions**

➤ Pre drying

Initial moisture content

- Conditions during harvesting

Time between harvest and processing

- Degradation during storage through self-heating, enzymes, etc.

Microbial infestation

➤ During drying

Air temperature


- Significant impact on product temperature
Losses of valuable components, cell damages

Relative humidity inside the dryer

Air flow

Raw material thickness

- Quality losses during any processing step **cannot** be compensated in further processing steps!
 - The **whole processing chain** needs to be excellent!

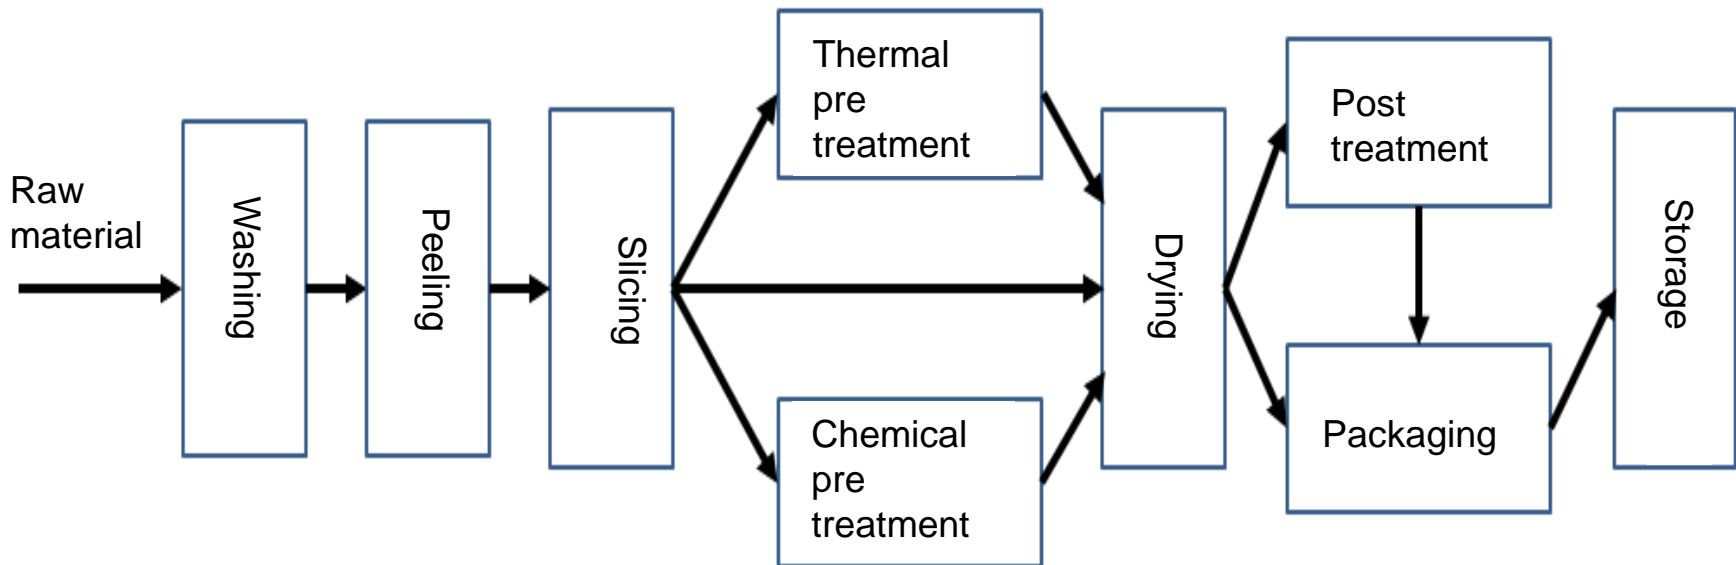

- The drying process (duration, process parameters) depends on the raw material
 - Each drying process is individual and should be controlled dependent on the raw material quality

Pre treatments

Pre treatments of fruits aim to reduce bioactive processes like non-enzymatic browning

⇒ Chemical:

- **Ascorbatic acid/citric acid**

⇒ Thermal:

- **Blanching (loss of soluble compounds!!)**

However, all chemical and microbial degradation processes need water

⇒ minimum duration between pre-processing and drying to retain quality, short drying times



Further quality influencing factors

Air distribution (should be equal throughout the dryer)

- ⇒ Unequal air distribution results in unequal drying of the bulk
- ⇒ Can be improved by small changes of the dryer construction to get an uniform distribution
- ⇒ Can be improved by implementation of appropriate fans

Raw material

- ⇒ peeled/unpeeled
- ⇒ initial moisture content
- ⇒ thickness

Improvements in fruit drying

⇒ **Product specific drying**

- Product species, shape
- Knowledge of valuable components

⇒ **Control of air velocity**

- Removal of moisture
- Equal air distribution

⇒ **Product temperature controlled drying**

Phase drying: higher temperatures in the beginning until the surface is dry, further drying at quality saving temperatures

- Quality parameters have to be defined
- Critical temperature has to be known

⇒ **decreased drying times, high product quality**

Big demand for fruit powders worldwide


- ⇒ Natural colourants
- ⇒ Food supplements
- ⇒ Pharmaceutica

Possibility to gain > 80 €/kg fruit powder (quality dependent)



Requirements:

- ⇒ < 5 % moisture content
- ⇒ Gentle milling to avoid heat stress ⇒ quality losses!
- ⇒ Product specific packaging and storage to avoid remoistening

Excursion: Temperatures as Functions of Moisture Content

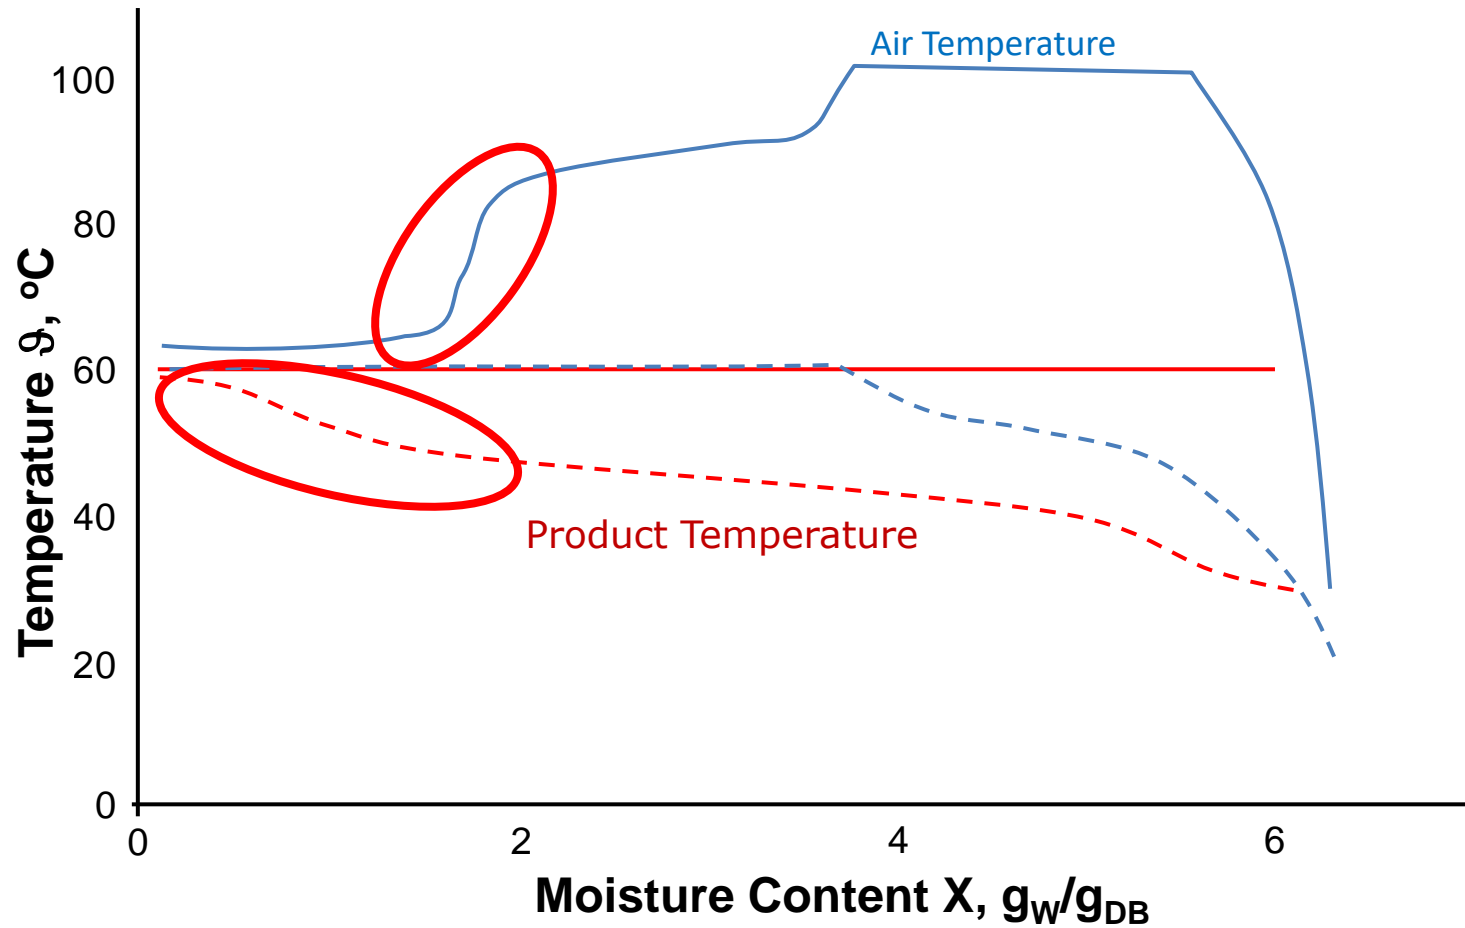

Comparison of air temperature (T_A) and product temperature (T_P) controlled drying

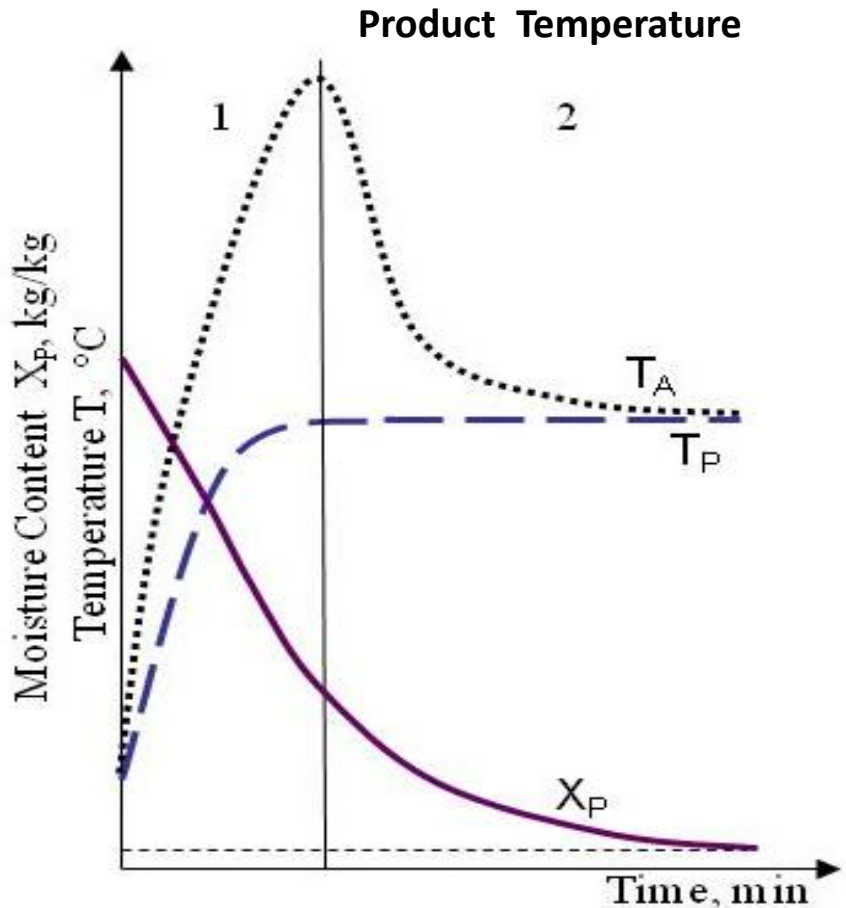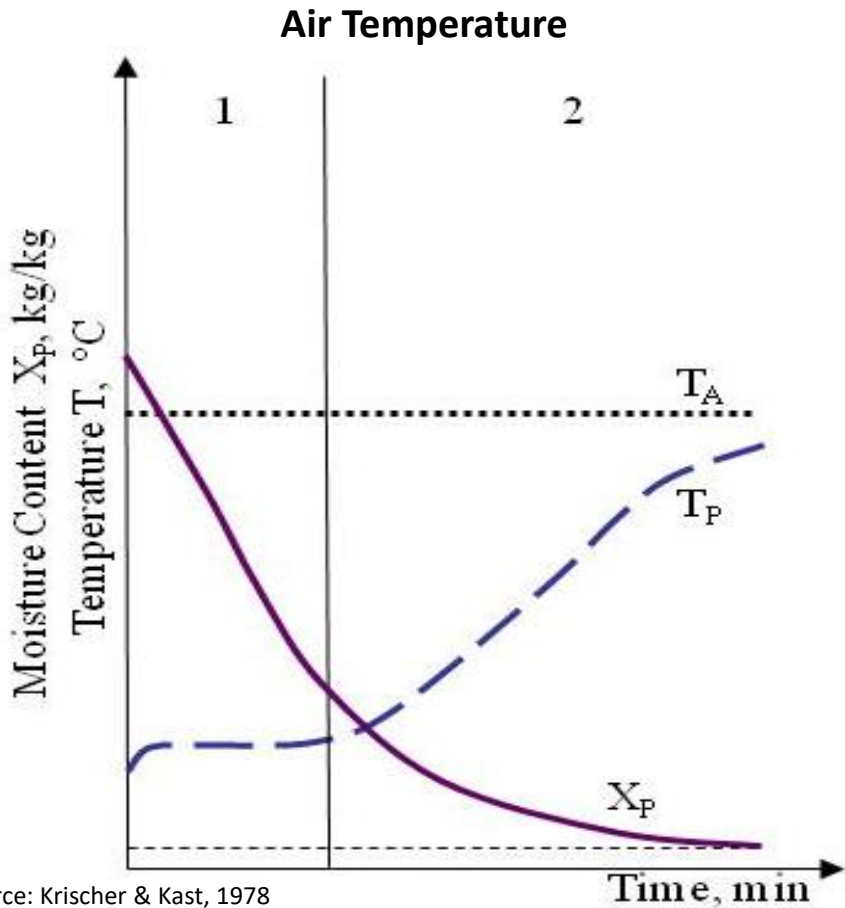

Source: Krischer & Kast, 1978

Cost effective devices for product surface temperature measurement

- **Pyrometer**
 - **Infrared (IR) camera**
 - Data can feed back into the system
- Product Temperature controlled drying**

Further

- **Drying strategies based on colour**
 - CCD sensor applications (RGB cameras etc.)
- **Drying strategies based on spectral information**
 - photospectrometer, hyper spectral imaging etc.


Fruit drying aims to achieve high product qualities and low energy consumptions

therefore

- **The drying time of fruits should be as short as possible**
- **Processing parameters are related to every individual product**
- **Drying parameters are not fixed and their control is related to the changes of the product during drying**

- Chua, K. J.; S. K. Chou; J. C. Ho; A. S. Mujumdar & M. N. Hawlad. 2000. Cyclic Air Temperature during drying of guave pieces: Effects on moisture and ascorbic acid contents. *Food and Bioproducts Processing* 78 (2): 28-72.
- Krischer, O. & W. Kast. 1978. Die wissenschaftlichen Grundlagen der Trocknungstechnik, Bd. 1. 3. Auflage, Springer Verlag, Berlin, Heidelberg.
- Martynenko, A. 2008. Computer Vision System for Ginseng Drying: Remote Sensing, Control and Optimization of Quality in Food Thermal Processing. VDM Verlag, Saarbrücken
- Mujumdar, A. S. 2007. Handbook of Industrial Drying. CRC Press, Boca Raton, New York, Oxon
- Sturm, B. 2018. *Automatic control of apple drying with respect to product temperature and air velocity in*

- 1. What is the minimum air velocity required for fruit drying?**
- 2. What causes quality losses in dried herbs
pre drying?
during drying?**
- 3. Name a risk that can occur during blanching
(pre treatment)**
- 4. What is the final moisture content for
producing fruit powders?**

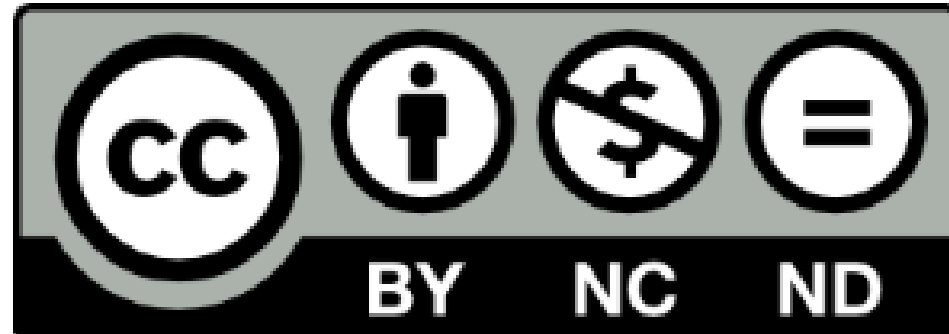

This work is licensed under the Creative Commons Attribution-NonCommercial-NoDerivatives 4.0 International License. To view a copy of this license, visit <http://creativecommons.org/licenses/by-nc-nd/4.0/>.